



THE FIRST & ONLY FLOORING ADHESIVE POWERED WITH MICROBAN®*



**ROBERTS® AND MICROBAN® OFFER
SUPERIOR PROTECTION AND PEACE OF MIND**



This built-in Microban® antimicrobial technology is integrated during the manufacturing process, and will remain present and active in our adhesives — working at a cellular level to continually disrupt the growth and reproduction of surface-contaminating microorganisms.



SHELF LIFE
2 YEARS

Extended Product Shelf Life

Powered with Microban® antimicrobial technology, ROBERTS adhesives offer a **2-Year Shelf Life** when stored in the original, unopened container in a controlled environment.



LIFETIME
WARRANTY

Lifetime Warranty

Adhesives bearing this mark qualify for lifetime coverage, only when installation is performed by an Industry Certified Installer in compliance with all product usage guidelines specified by flooring manufacturer, industry standard floor preparation product specifications, and ROBERTS' adhesive specifications.



CERTIFIED BY
SCS Global Services

Products that are **FloorScore** certified meet the air quality emissions criteria for LEED, CHPS and the Green Guide for Health Care.

Scan Here
to Learn More



Microban® is a registered trademark of Microban Products Company.

FLOORING ADHESIVES & SURFACE PREP

ICON LEGEND



LIFETIME WARRANTY

Adhesives bearing this mark qualify for lifetime coverage, only when installation is performed by an Industry Certified Installer in compliance with all product usage guidelines specified by flooring manufacturer, industry standard floor preparation product specifications, and ROBERTS' adhesive specifications.



TWO YEAR SHELF LIFE

Powered with Microban® antimicrobial technology, ROBERTS adhesives offer a 2-Year Shelf Life when stored in the original, unopened container in a controlled environment.



MICROBAN® PROTECTION

24/7/365 antimicrobial protection integrated during manufacturing to limit the growth of mold, mildew and bacteria.



FLOORSCORE CERTIFIED

Products that are FloorScore certified meet the air quality emissions criteria for LEED, CHPS and the Green Guide for Health Care.



CRI GLP +PLUS

The Carpet and Rug Institute's Green Label +Plus® Logo indicates our adhesive has been tested and meets the most stringent criteria for low chemical emissions.



LEEDS V4 QUALIFIED ADHESIVES

LEED® certification is a globally recognized symbol of sustainability achievement. Many of our adhesives contribute one or more points in the LEED® rating systems. Learn more at www.usgbc.org/LEED.



ENVIRO FRIENDLY

When you see our green "e" logo, you are choosing a product that is environmentally conscious, while supporting a company that is committed to protect and sustain our environment.



ECO FRIENDLY

Zero-VOC products contain zero measured volatile organic compounds, reducing the risk of material harm to users.



MOISTURE PROTECTION

Our best-in-class flooring adhesives are equipped with moisture control technology to withstand moisture vapor emission rates (MVER) up to 12 lbs., and relative humidity (RH) up to 99%.



HIGH-SOLIDS CONTENT

High solids content means the adhesive has a high proportion of bonding material and less water resulting in less shrinkage, faster dry times, greater coverage and superior bond strength.



TRANSITIONAL

An adhesive that is installed in one state, but changes to another as it cures.



FAST DRY TIME

Often referred to for pressure sensitive flooring as "flash time", "dry time" means the material is ready to accept flooring placement or in the case of primers, the material is ready to accept an underlayment or adhesive.



EXTENDED WORKING TIME

Extended working time means you have a longer period after applying the adhesive to manipulate, reposition, and align parts before it starts to cure, allowing for complex applications, larger areas, or precise placement without rushing.



MADE FOR WIDE PLANKS

Made for wide planks means the product is specifically formulated with properties like enhanced bond strength and elasticity to handle the unique challenges of wider and thicker engineered wood planks.



STAIR INSTALLATION

Stair installation requires strong bonding adhesives to permanently fix stair components like treads, risers, and stair nose into place, either as the sole method of attachment or, combination with mechanical fasteners like nails or screws.



STAND AND SPRAY

Stand and spray method for aerosol adhesives, allows for quick application and keeps installers off their knees and can be rapidly applied in large areas.



INDOOR/OUTDOOR

Indoor/outdoor adhesives are bonding agents formulated to withstand both stable indoor conditions and the harsher, fluctuating environments of the outdoors, offering superior resistance to moisture, UV light, and temperatures.



CUTBACK ISOLATOR

Cutback residue isolator adhesives are products designed to seal and neutralize leftover cutback flooring adhesives so new flooring can be safely installed over them.



CHEMICAL BLOCKING TECHNOLOGY

Chemical blocking technology refers to specialized materials to create barriers, trapping contaminants like old adhesives to improve adhesion, safety, and durability for installations over challenging substrates.



ALKALINITY RESISTANCE

Alkalinity resistance in means the product creates a barrier that stops high-pH concrete from attacking adhesives and flooring, preventing failure like blistering, peeling, and softening. These polymer-based surface prep products neutralize or block the concrete's natural high alkalinity (pH 12-13), reducing it to a safe pH level (around 9) for better adhesive bonding.

Scan QR codes featured with each product to access more details including product data sheets, safety data sheets, product certification eligibility (i.e., FloorScore, CRI GLP +Plus®, Enviro Friendly and LEED®) and more.

SURFACE PREP

NEW

NEW



Benefits

- Ready-to-use, single-component primer –no dilution necessary
- Fast-drying formula (30-60 minutes)
- Dries semi-clear
- Increases coverage rate of adhesive
- Coverage up to 400 per ft²/gal

- Isolates old multipurpose, pressure sensitive, acrylic-based, and cutback adhesive residue
- Ensures proper bonding of new adhesive
- Protects against reactive cutback adhesive residue
- Chemical-blocking technology with high pH resistance
- Coverage up to 360 per ft²/gal

Moisture limits



Detailed product info



Approved Flooring

APA underlayment grade plywood and OSB



Association grade particleboard



Cement backer board



Concrete



Acoustical concrete



Gypsum and light-weight concrete



Floor patch



Old cutback residue



PSA adhesive residue



Multipurpose / carpet adhesive residue



Acrylic-based adhesive residue



Radiant heated subfloors



Availability

(4g) FS400-4, (1g) FS400-1

(4g) FS410-4

RESILIENT




Benefits

- For use with LVT, LVP, VCT, vinyl sheet goods, carpet tile (vinyl backed), carpet cushion to substrate, and stair tread
- Superior shear strength, ideal for environments with heavy traffic or rolling loads
- Durability with reduced floor movement
- Maximum moisture control 12 lbs. MVER / 99% RH
- Coverage up to 350 per ft²/gal

- For use with LVT, LVP, VCT, solid-backed carpet, carpet tiles, sheet goods, recycled rubber and underlayment
- Pressure-sensitive formula with tenacious bond
- Maximum moisture control 12 lbs. MVER / 99% RH
- 4g pail features a pour spout lid
- Coverage up to 350 per ft²/gal

- For use with LVT, LVP, VCT, fiberglass-sheet goods and acoustical underlayment
- Releasable, pressure-sensitive formula with aggressive bond
- Maximum moisture control 10 lbs. MVER / 90% RH
- Optimal viscosity for easy trowelling/rolling
- Coverage up to 350 per ft²/gal

Moisture limits

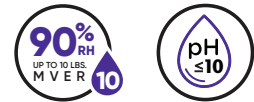



































Detailed product info



Approved Flooring

Carpet cushion to substrate	✓	✓	✓
Carpet tile (hard & soft backed)	✓	✓	✓
Cork-backed hard surface	✓	✓	
Cork flooring	✓	✓	
Cork underlayment	✓	✓	✓
Cove base			
Linoleum			
LVT/LVP	✓	✓	✓
Rubber (tile & sheet)	✓	✓	✓
Sheet goods	✓	✓	✓
Stair treads (vinyl)	✓	✓	✓
VCT/VET	✓	✓	✓
Availability	(4g) 6399-4, (1g) 6399-1	(4g) 7399-4, (1g) 7399-1	(4g) 7350-4, (1g) 7350-1, (1Q) 7350-0

RESILIENT (CONT)

	   	    	    
Benefits	<ul style="list-style-type: none"> • For use with LVP, LVT, fiberglass-backed sheet vinyl, vinyl-backed carpet tile, rubber sports flooring and rubber tiles • Excellent initial grab and early bond strength • Very high peel and shear strength to lock flooring in place • Coverage up to 300 per ft²/Gal 	<ul style="list-style-type: none"> • For use with fiberglass-sheet vinyl, small format LVP (up to 12" x 12") and modular carpet tiles • Acrylic pressure-sensitive with superior bond that remains strong • Coverage up to 240 per ft²/Gal 	<ul style="list-style-type: none"> • For use with vinyl composition tile • Good residual tack and extended working time • Low odor, low VOC • Coverage up to 240 per ft²/Gal
Moisture limits	 	 	 
Detailed product info			
Carpet cushion to substrate			
Carpet tile (hard & soft backed)			
Cork-backed hard surface			
Cork flooring			
Cork underlayment			
Cove base			
Linoleum			
LVT/LVP			
Rubber (tile & sheet)			
Sheet goods			
Stair treads (vinyl)			
VCT/VET			
Availability	(4g) 2350-4	(4g) 2310-4	(4g) 2057-4, (1g) 2057-1, (1Q) 2057-0

Approved Flooring

RESILIENT (CONT)




Benefits

- For use with felt-backed sheet vinyl
- Lifetime non-staining warranty
- Optimal open and work time
- Coverage up to 190 per ft²/Gal

- For interior installation of vinyl / rubber / carpet wall base
- Superior green grab to keep corners wrapped tight
- Rapid set-up for fast, easy installation
- Coverage up to 60 linear ft/30 oz cartridge

- For use with LVT, LVP, VCT and carpet tile
- Quick, easy 'Stand and Spray' installation
- Pressure sensitive, aggressive tack and high-shear strength
- Ready immediately for light foot traffic
- Coverage up to 150 ft²/19 oz

Moisture limits







































Detailed product info



Approved Flooring

Carpet cushion to substrate			
Carpet tile (hard & soft backed)			✓
Cork-backed hard surface			
Cork flooring			
Cork underlayment			
Cove base		✓	
Linoleum			
LVT/LVP			✓
Rubber (tile & sheet)			
Sheet goods	✓		✓
Stair treads (vinyl)			
VCT/VET			✓
Availability	(4g) 2001-4, (1g) 2001-1	(4g) 7200-HP4, (30oz) 7200-HP30, 1(g) 7200-HP1, (11oz) 7200-HP11	(19oz) 8799-19

WOOD

	 	 	 	 
<p>Benefits</p>	<ul style="list-style-type: none"> • Ideal with pre-finished engineered wood planks (up to 5/8" thick and 12" wide), plain backed parquet and cork underlayment • Strong, durable bond • Low odor and low VOC • Coverage up to 55 per ft²/gal 	<ul style="list-style-type: none"> • Fore use with Full-surface bonding of solid and engineered wood and mosaic / industrial parquet flooring • Sound reduction, crack bridging, and unlimited moisture protection* • No moisture testing required • 25-year bond warranty • Coverage up to 40 per ft²/gal 	<ul style="list-style-type: none"> • For glue assist when installing engineered wood, wood baseboards and parquet floors • Ideal for quick repairs, hollow spots and installing thresholds, moldings and medallions • Coverage up to 30-oz cartridge 1/4" bead - 56 lineal feet 3/8" bead - 35 lineal feet 	<ul style="list-style-type: none"> • For floating applications of laminate and wood flooring that requires a tongue and groove adhesive • Fast-drying formula with exceptional bond strength • Water-resistant ANSI/HPVA Type II / D3 • Quick, flip-top applicator lid • Coverage up to 400 linear feet per bottle 
<p>Detailed product info</p>				
<p>Acrylic impregnated plank</p>				
<p>Bamboo flooring</p>				
<p>Cork-backed hard surface</p>				
<p>Cork flooring</p>				
<p>Cork underlayment</p>				
<p>Dry-back parquet</p>				
<p>Engineered wood</p>				
<p>Solid hardwood</p>				
<p>Availability</p>	<p>(4g) 1487-4, (1g) 1487-1</p>	<p>(4g) 1550-4</p>	<p>(30oz) 1407-30c</p>	<p>(8 oz) 1406-P</p>

Approved Flooring

CARPET



Benefits

- For the most demanding carpet installations, including broadloom carpet
- Ready for light traffic in 12 hours
- Fast grab and excellent for double-bond installations
- Maximum moisture control 10 lbs. MVER / 90% RH
- Coverage up to 200 per ft²/Gal

- Ideal for patterned carpet, felt-backed sheet vinyl and unfinished cork underlayment
- Commercial-grade formula with fast green grab for immediate light traffic
- Extended working time (up to 70 minutes).
- Coverage up to 175 per ft²/Gal

- Ideal for covered patios, decks, sun rooms and basements
- Excellent moisture resistance when cured
- For most indoor and outdoor carpets (in covered exterior application)
- Coverage up to 110 per ft²/Gal

Moisture limits



Detailed product info



Outdoor carpet / Artificial grass



Broadloom carpet



Carpet cushion



Carpet tile (not for use with vinyl-backed products)



Cork underlayment



Felt-backed sheet goods





























Availability

(4g) 3095-4, (1g) 3095-1

(4g) 3087-4

(4g) 6700-4, (1g) 6700-1, (1Q) 6700-0

MULTIPURPOSE

			
<p>Benefits</p>	<ul style="list-style-type: none"> • For use with hard-to-bond commercial carpet, sheet vinyl, and cork underlayment • Aggressive grab for reduced bubbling and curling • Repositionable with excellent re-bond properties • Coverage up to 180 per ft²/Gal 	<ul style="list-style-type: none"> • For use with pattern carpets, felt-backed sheet vinyl and unfinished cork underlayment • Repositionable with excellent re-bond properties • Coverage up to 180 per ft²/Gal 	<ul style="list-style-type: none"> • For use with mineral or felt-backed sheet vinyl, latex foam-backed carpet and other types of flooring • Longer open time for optimal positioning • Low-odor, low-VOC formula • Coverage up to 180 per ft²/Gal
<p>Moisture limits</p>	 	 	 
<p>Detailed product info</p>			
<p>Outdoor carpet / Artificial grass</p>			
<p>Broadloom carpet</p>			
<p>Carpet cushion</p>			
<p>Carpet tile</p>			
<p>Cork underlayment</p>			
<p>Felt-backed sheet goods</p>			
<p>Availability</p>	<p>(4g) 3300-4</p>	<p>(4g) 3085-4, (1g) 3085-1, (1Q) 3085-0</p>	<p>(4g) 3000-4, (1g) 3000-1</p>

Approved Flooring



ROBERTS®

the American Adhesive Company™




For decades, professional installers have turned to ROBERTS for dependable, high-performance flooring installation adhesives.

Over time, our adhesive offering has evolved to meet the changing needs of the flooring industry, with categories designed for every type of a successful installation — from surface preparation to resilient, wood, carpet, multipurpose, and specialty adhesives.

This growth reflects not only innovation in formulation and technologies, but also our on-going collaboration with top-tier installers and the trade affiliates that certify their expertise. By working closely with the professionals who rely on these products every day, we ensure that each product we develop is rigorously tested and proven to perform under real-world conditions.

The result is a portfolio of solutions that support beautiful, enduring flooring installations.

When results and precision matters, there is no second choice. Trust ROBERTS®

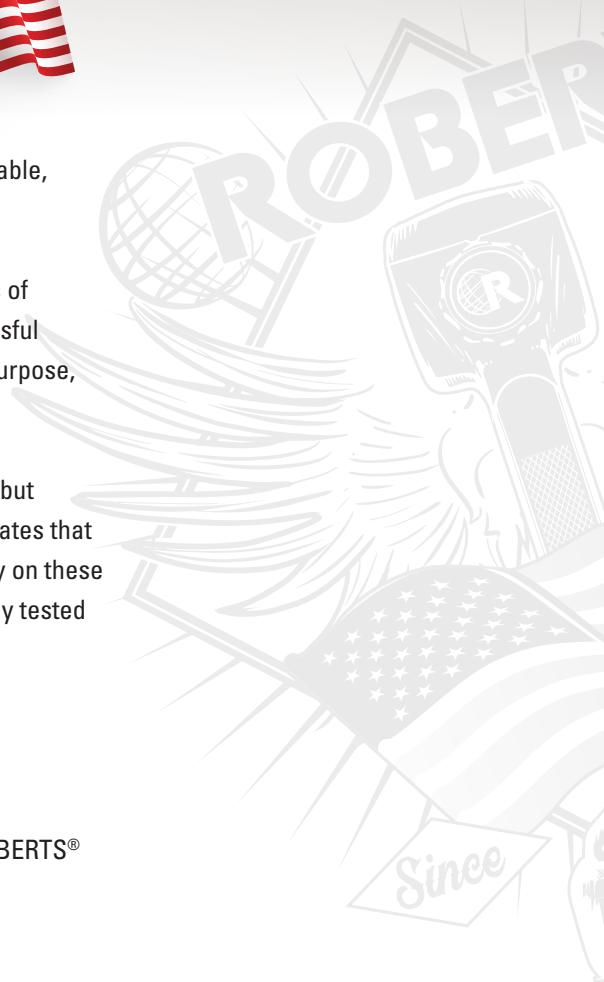

FLOORING ADHESIVES & SURFACE PREP

PRODUCT GUIDE

ROBERTS®



1001 Broken Sound Parkway, NW
Boca Raton, Florida 33487

For more information call 866-435-8665
Se habla español



robertsconsolidated.com
gepcorporate.com

Scan here
for the latest



ROBERTS®
TOOL CATALOG

Scan here
for the latest



ROBERTS®
ADHESIVE CATALOG